




LEAK TESTING

KVLD-3000 VACUUM LEAK TESTING GUN

The Vacuum Leak Tester KVLD-3000 is a simple precise method of testing tubes in Boilers, Condensers, and Heat Exchangers. It is the fastest most accurate means of location leaky tubes.

Powered by compressed air the Vacuum Leak Detector pulls a vacuum in a tube to a desired reading on the gauge. A steady reading would indicate that the tube is sound, if the reading on the gauge drops the tube has a leak.

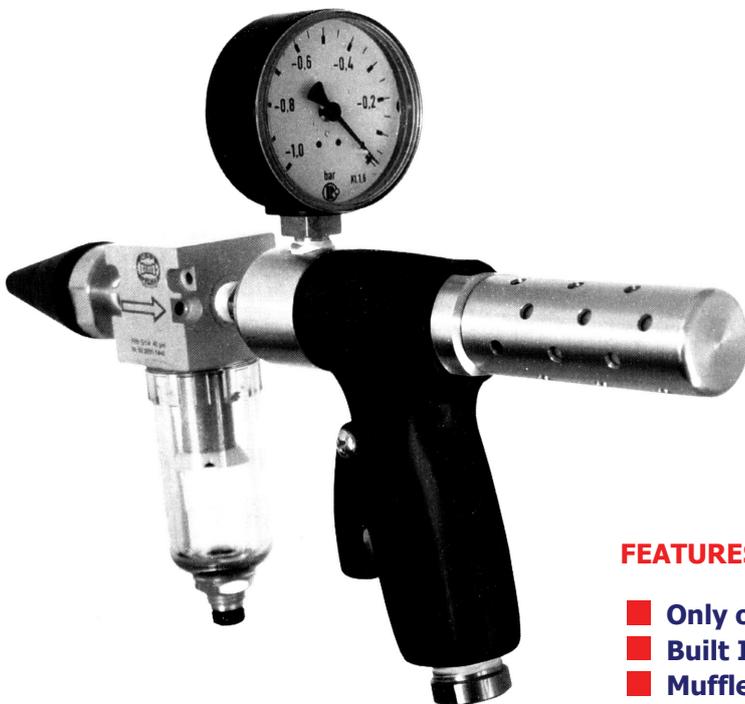


FEATURES

- Only one tool necessary for multiple tube sizes.
- Built In easy to read vacuum gauge.
- Muffled exhaust for quiet operation.
- Lightweight, easy to use.



LEAK TESTING

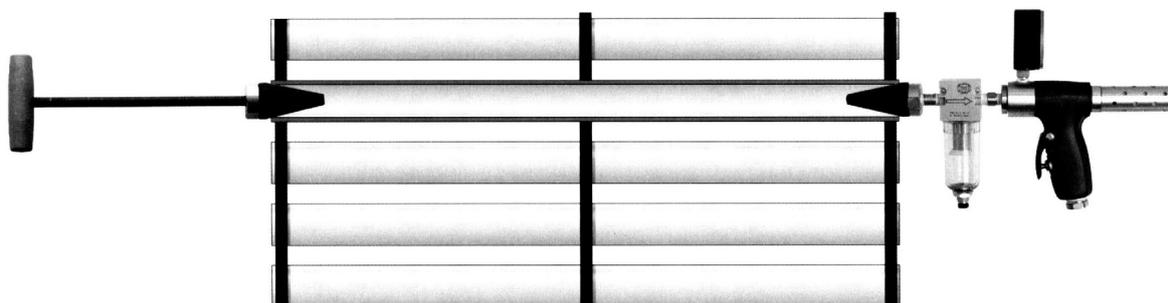


OPERATING INSTRUCTIONS

1. Seal far end of tube to be tested with "T" handle type tube plug.
2. Place nozzle of tester into near end of tube.
3. Squeeze trigger of test unit until gauge reaches desired reading.
4. Release trigger and observe gauge
5. A steady reading indicates no leaks
6. Move to next tube and repeat

SPECIFICATIONS

- Cover wide range of tubes with one unit 6.3 (1/4") to 76.2 mm (3").
- Air Pressure: 6.2 bar (90 PSI).
- Air Consumption: 720l/min (26CFM).
- Case Dimensions: 410 x 300 x 85mm.
- Unit weight: 1.2Kg (4.4lbs).
- Approx shipping wt: 3 kg (6.6lbs).

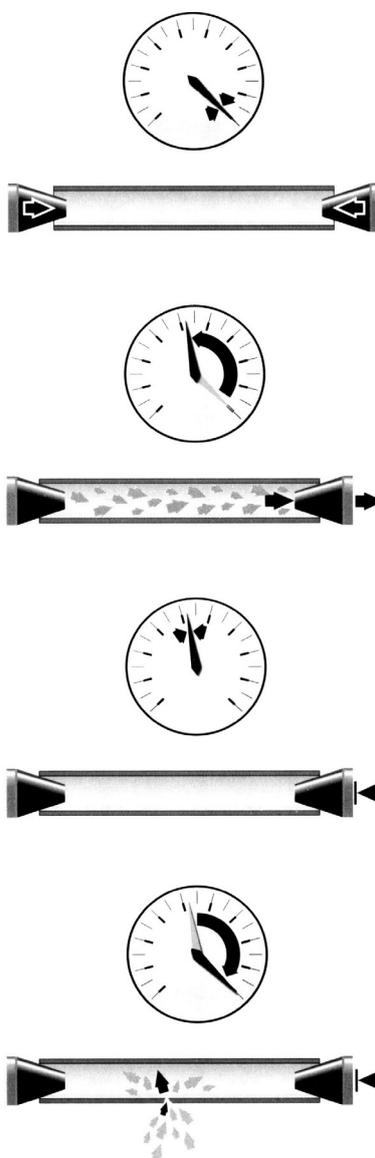

NOZZLES AVAILABLE

PART NUMBER	TUBE OD SIZE
K-1002	1/4" (6,3 mm) - 3/4" (19 mm)
K-1003	5/8" (15,9 mm) - 1 1/4" (31,7 mm)
K-1004	1 1/8" (28,6 mm) - 2" (50,8 mm)
K-1005	1 7/8" (47,6 mm) - 3" (76,2 mm)

Tel: +44 (0) 23 8036 6410
Fax: +44 (0) 23 8039 9113

E-mail: tuberunner@bsa-regal.co.uk
Web: www.tuberunner.co.uk