

HYDRAULIC FLANGE SPREADER

RENQUIP FSW17P



A Hydraulic Flange Spreading Wedge with a combined hydraulic cylinder and pump unit.

The FSW17P flange spreading wedge can enter a flange joint access gap as small as 6mm and produce a maximum force of 326kN when used in pairs (as recommended) to push the mating faces of flanges apart. The FSW17P can create a gap up to 81mm between flange faces with the stepped blocks fitted facilitating the replacement of gaskets, seal rings, or other flange face maintenance and testing.

- **100% Load/Pressure tested and certified**
- **High durability High Quality low Maintenance design**
- **Tool weight 8.5Kg**
- **Max Spreading force 163kN (326kN when used in pairs)**
- **spreading distance 6mm to 81mm when used with stepped blocks**
- **Robust Moulded Case** for easy transportation and storage




+44 (0) 23 8036 6410

tuberunner@bsa-regal.co.uk



www.tuberunner.co.uk

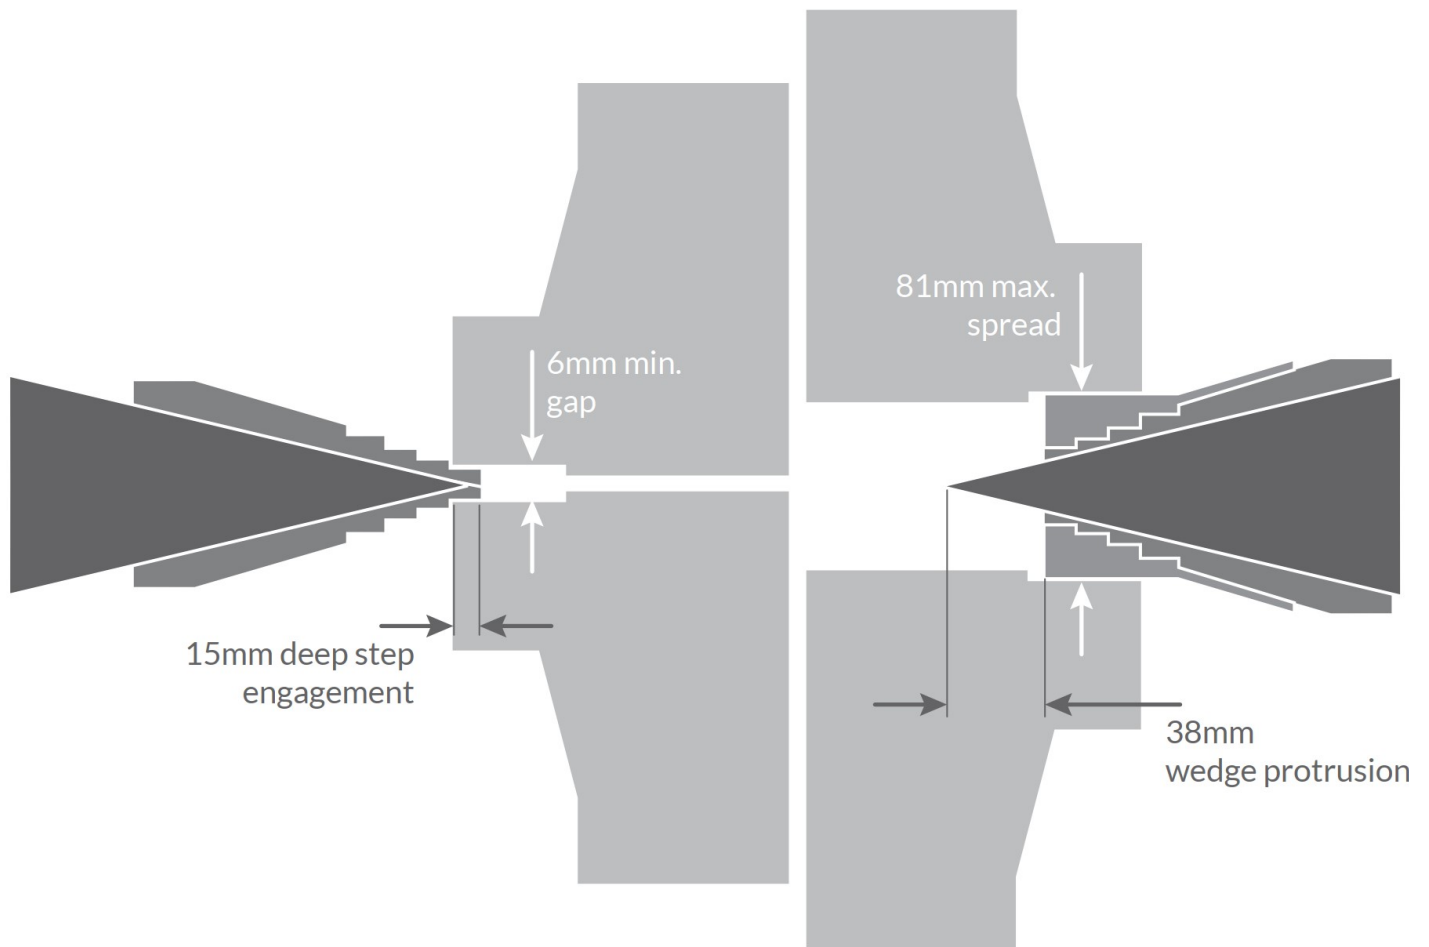

Kit weight	13Kg
Kit dims	580mm x 340mm x 180mm
Tool weight	8.5Kg
Tool dims	76mm x 155mm x 440mm
Product ordering code	25.FSW17P

Kit Content

- 1 x FSW17P Tool with combined hydraulic cylinder and pump unit
- 1 x Pump Actuating Handle
- 1 x Safety Block
- 1 x Safety Lanyard
- 2 x Stepped Blocks with securing screws and allen key