

K60

HEAVY DUTY PNEUMATIC ROLLING MOTOR




The K60 is a heavy duty pneumatic torque controlled motor for the expansion of tubes used in Heat Exchangers, Condensers and Coolers.

This machine is particularly well suited to extended periods of operation. It has a lightweight aluminium housing for easier handling and less operator fatigue.

The torque control clutch mechanism is easily set and ensures precise, repeat expansions over long periods of use.

Three machines are available to suit tubes of nominal sizes 1 ½", 2" & 2 ½"

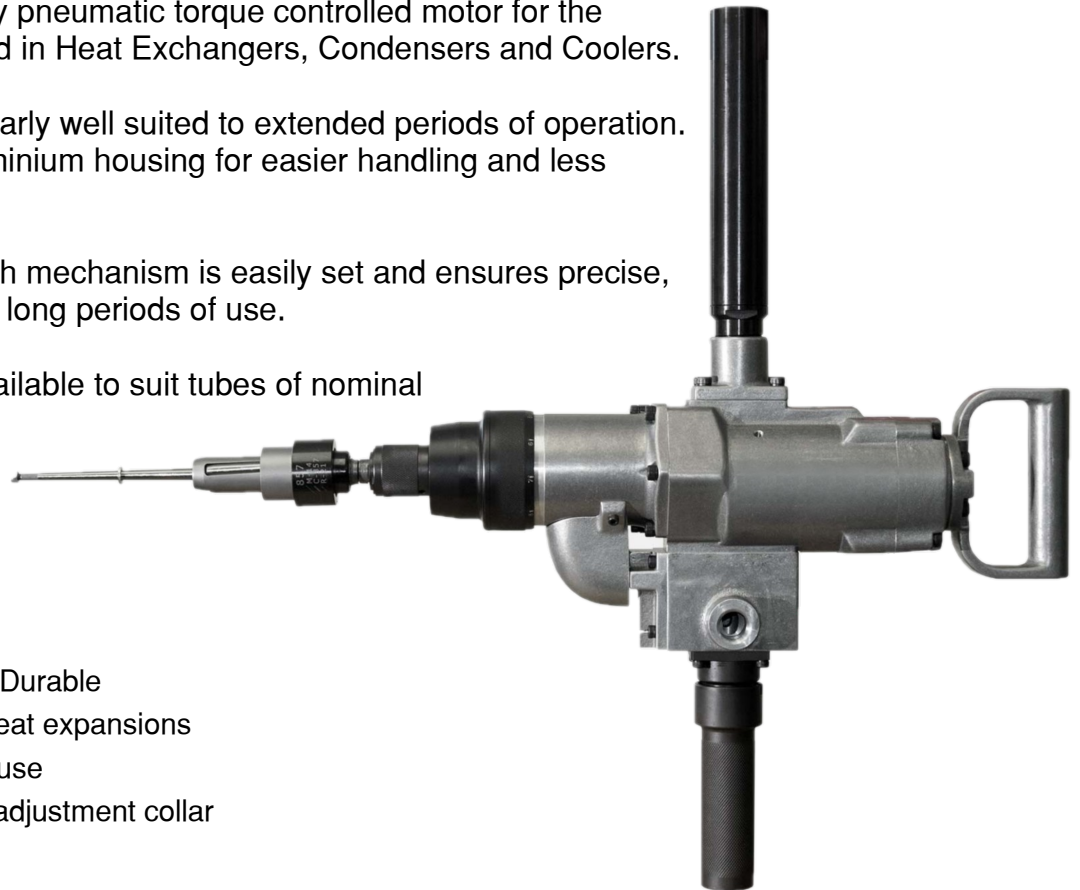

Features

- ▶ Heavy Duty & Highly Durable
- ▶ Ensures Precise, repeat expansions
- ▶ Reliable and easy to use
- ▶ Simple dial-a-torque adjustment collar

| MODEL | TUBE CAPACITY | FREE SPEED | MAX TORQUE | LENGTH | WEIGHT | STANDARD CHUCK SIZE | OPTIONAL CHUCK SIZE |
|---------|----------------|------------|-----------------------|--------------|--------------------|---------------------|---------------------|
| K60-900 | 38.1mm 1 ½" | 756 RPM | 41.6 NM 30.7 ft.lb | 457mm 18" | 12.25 KG 27 lbs | 3/8" 1/2" | 3/4" 1" |
| K60-400 | 50.8mm 2" | 400 RPM | 82.5 NM 61 ft.lb | 457mm 18" | 12.25 KG 27 lbs | 3/4" 1" | 3/8" 1/2" |
| K60-250 | 63.5mm 2 ½" | 220 RPM | 135.5 NM 100 ft.lb | 457mm 18" | 12.25 KG 27 lbs | 3/4" 1" | 3/8" 1/2" |

+44 (0) 23 8036 6410

tuberunner@bsa-regal.co.uk



www.tuberunner.co.uk